


How to use



1. Remove the rubber feet from the base of your demolition saw.
2. Use existing screws in rubber feet once removed to attach the carriage to the base of the demolition saw following the guide below.

STIHL TS700 & TS800 PUSHED UP AGAINST THIS SLOT END

STIHL TS500 PUSHED UP AGAINST THIS SLOT END

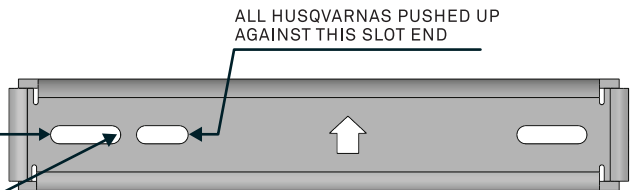

3. Chalk line the area you wish to cut. Lay the Sawtrac aluminium track/guide in line with the chalk line.
4. For longer cuts, connect multiple lengths of the Sawtrac aluminium track/guide together.



5. Place the Sawtrac carriage unit into track/guide so it is gently directed along the front edge.



6. You're now ready to start cutting by gently pushing your saw along the guided track.

Sawtrac Warranty

Conditions for Warranty

1. Please retain your receipt as proof of purchase for your warranty to be valid.
2. Guaranteed for 12 months from the date of purchase.
3. This Warranty covers defects in materials and workmanship upon receiving this product.
4. Normal wear and tear is not covered by this warranty.
5. Damages resulting from the following are not covered by this warranty:
 - i) Negligence, misuse, disassembly or dropping.
 - ii) Alteration or repair by any person other than an authorised Repair Dealer
6. This Warranty covers only the original purchaser of the product. The limited warranty is not transferable to subsequent owners of purchases of this product.
7. Not adhering to the instruction manual will void this warranty.
8. Postage or delivery costs to and from repair centre must be paid by the purchaser from any warranty claims. Warranty does not assume the risk of loss during shipment.